

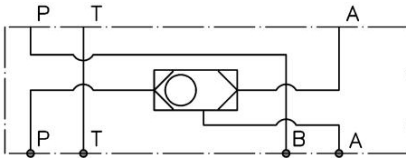
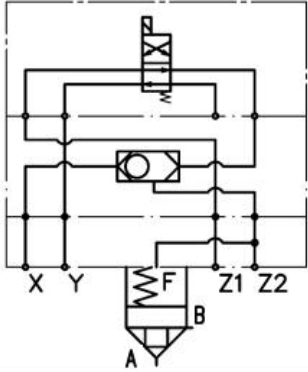
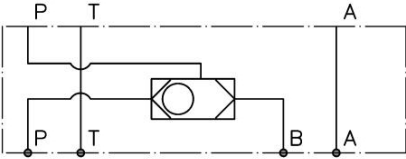
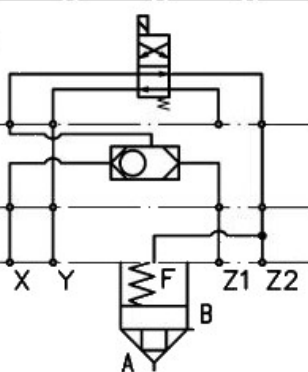
CETOP-03 SHUTTLE VALVE




Description

Cetop-03 shuttle valve .

Symbol


TYPE	HYDRAULIC DIAGRAM	EXAMPLE
<p style="text-align: center;">BMB-03/1</p>	<p style="text-align: center;">1</p> 	
<p style="text-align: center;">BMB-03/2</p>	<p style="text-align: center;">2</p> 	

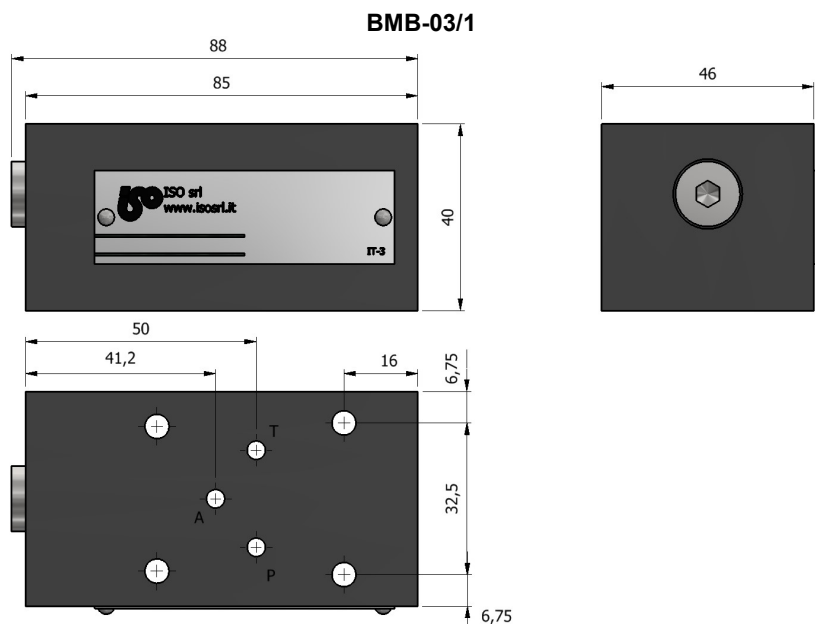Dimensions





BMB-03/2

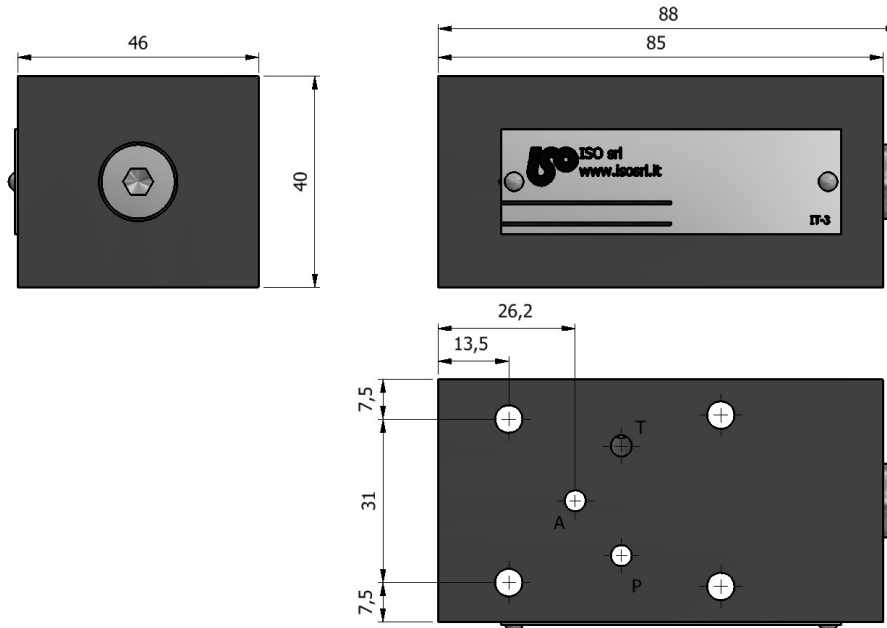

Installation rules

- The cetop-03 shuttle valve can be mounted in any position
- Fluid to be used: hydraulic oil in compliance with DIN 51524 rules, viscosity between 30 and 100 mm²/s (cSt) at 40°C
- Recommended filtration: 25μ
- Hydraulic fluid temperature: from -20° to +75°C

Ordering code

BMB - 03 /	*
	1 = Diagram 1 (Symbol table)
	2 = Diagram 2 (Symbol table)
Intermediate element with toggle valve	