

CETOP-03 SIZE MODULAR SUBPLATE




Characteristics

TYPE	THREADED PORTS	Ø SPOT-FACING	WEIGHT
SBM-03/210- **	3/8" BSP	23	0.8 Kg.


Description

Cetop-03 size modular subplate with side connection on A, B, P, or T ports on request.

Dimensions

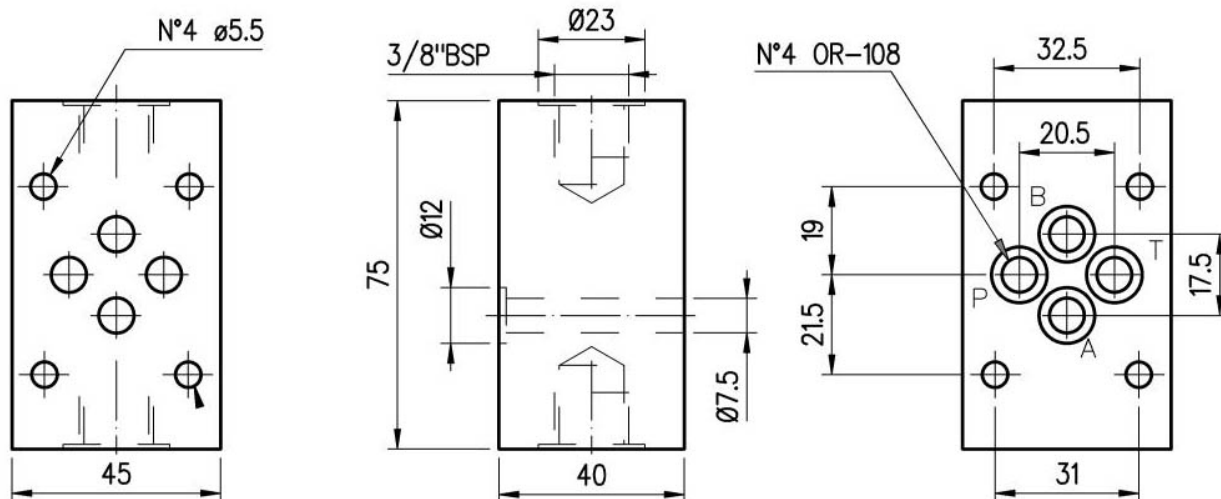

Models

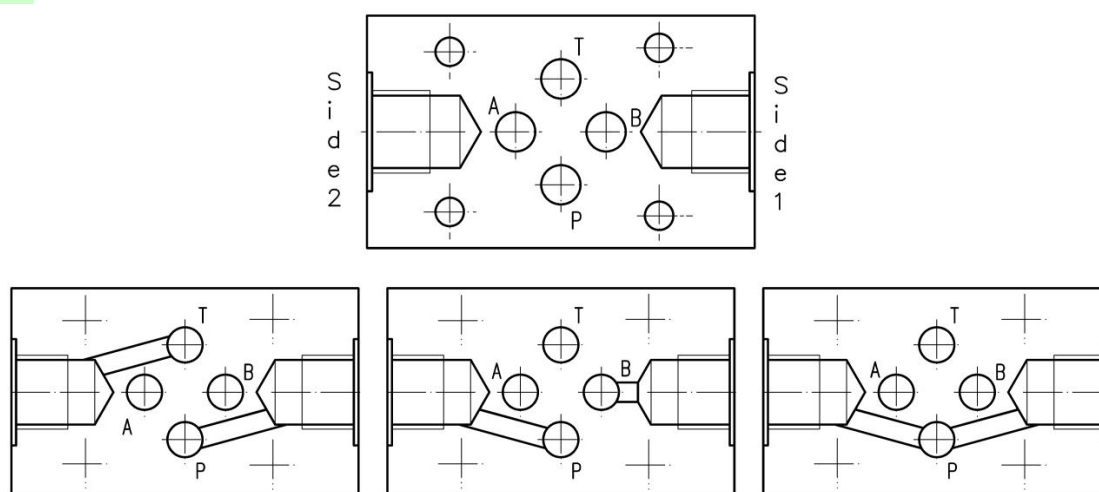

Ordering sample

T2 - P1 Model

P2 - B Model

P2 - P1 Model

Installation rules

- The subplates type SBM can be mounted in any position
- Fluid to be used: hydraulic oil in compliance with DIN 51524 rules, viscosity between 30 and 100 mm²/s (cSt) at 40°C
- Recommended filtration: 25µ
- Hydraulic fluid temperature: from -20° to +75°C

Ordering code

