


Characteristics

TYPE	P THREADED PORT	T THREADED PORT	X THREADED PORT	WEIGHT
ISB- 06R	1/2" BSP	3/4" BSP	1/4" BSP	2.8 Kg.

Description

CETOP-06R size subplate with side P-T and X ports.

Dimensions

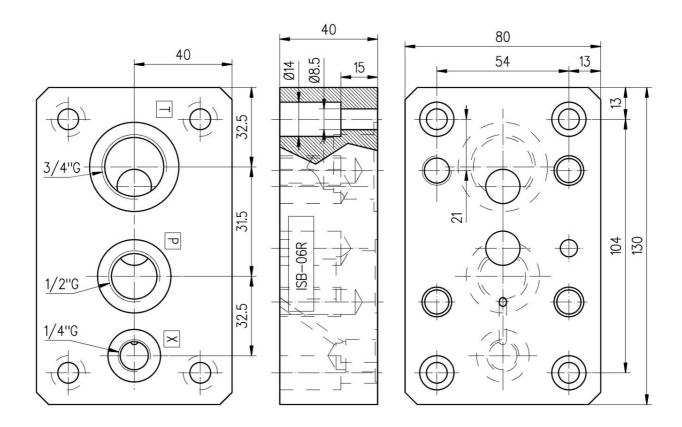

Installation rules

- The subplates type ISB can be mounted in any position
- Fluid to be used: hydraulic oil in compliance with DIN 51524 rules, viscosity between 30 and 100 mm²/s (cSt) at 40°C
- Recommended filtration: 25µ
- Hydraulic fluid temperature: from -20° to +75°C

Ordering code

ISB - 06R

CETOP 06R size subplate