

CETOP-03 SIZE MULTI-STATION SUBPLATE WITH PRESSURE CONTROL VALVE




Characteristics

Elements no.	1	2	3	4	5	6	7	8	9	10
H	110	160	210	260	310	360	410	460	510	560
Weight (Kg.)	3	4.4	5.8	7.2	8.6	10	11.4	12.8	14.2	15.6

Description CETOP-03 size multi-station subplate with rear and side 3/8" BSP A-B ports, 1/2" BSP P-T ports, equipped with pressure relief valve.

Dimensions

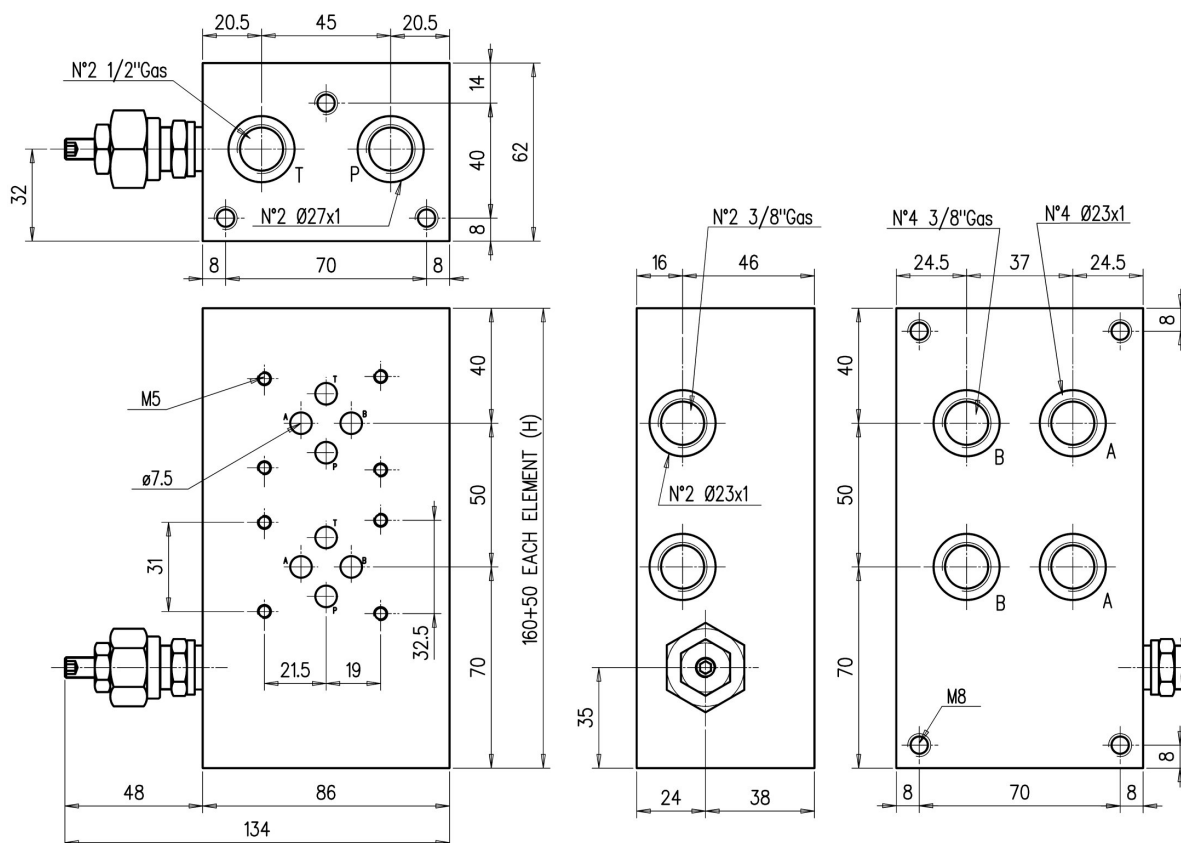

Installation rules

- The subplates type SBM can be mounted in any position
- Fluid to be used: hydraulic oil in compliance with DIN 51524 rules, viscosity between 30 and 100 mm²/s (cSt) at 40°C
- Recommended filtration: 25µ
- Hydraulic fluid temperature: from -20° to +75°C

Ordering code

SBM-38-03 / * / PL -M ***

Setting: **50** =5-50 bar **100** =30-100 bar **210** =50-210 bar **350** =100-350 bar

-M equipped with pressure relief valve (otherwise omit it)

Rear and side A-B ports

Number of stations

CETOP-03 size subplate with 3/8" BSP ports