

# CETOP-05 SIZE MULTI-STATION SUBPLATE WITH PRESSURE CONTROL VALVE




## Characteristics

Stations no.	2	3	4	5	6
H	200	275	350	425	500
Weight (Kg.)	7	10	13	16	19

## Description

CETOP-05 size multi-station subplate with rear 1/2" BSP A-B ports equipped with pressure relief valve.

## Dimensions

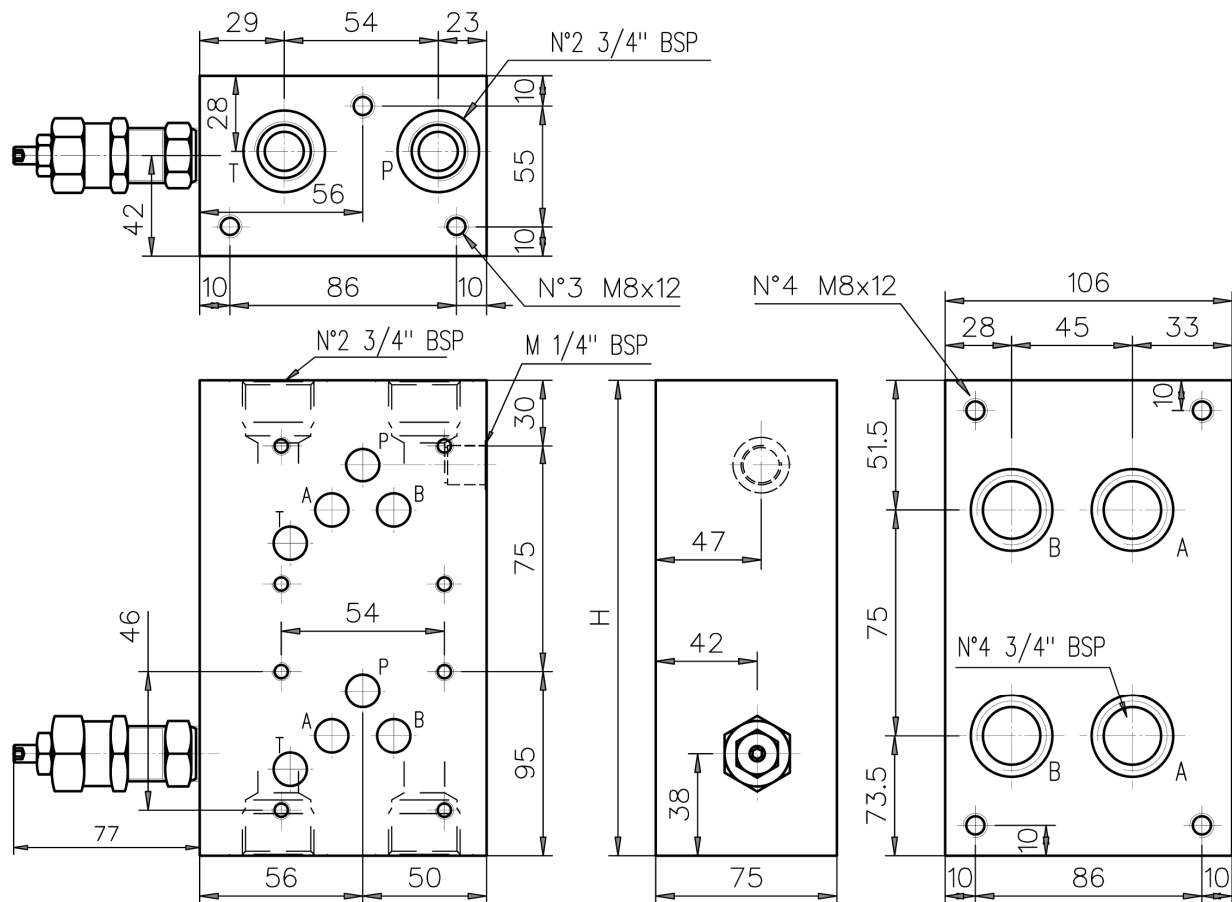

## Installation rules

- The subplates type SBM can be mounted in any position
- Fluid to be used: hydraulic oil in compliance with DIN 51524 rules, viscosity between 30 and 100 mm<sup>2</sup>/s (cSt) at 40°C
- Recommended filtration: 25µ
- Hydraulic fluid temperature: from -20° to +75°C

## Ordering code

SBM - 34 - 05 /	*	/	P - M	***
CETOP- 05 size subplate with 3/4" BSP ports				
Number of stations				
rear A-B ports				
with pressure relief valve				
Setting: 60=5-60 bar 120=35-120 bar 300=80-300 bar				