

CETOP-08 SIZE SUBPLATE WITH PRESSURE CONTROL VALVE




Characteristics

TYPE	THREADED PORTS	SPOT-FACING	SETTING RANGE	MAX. FLOW	WEIGHT
SBM-100-08/1-M***	1" BSP	Ø 40	80 ÷ 210 Bar	150 Lt./min.	11.8 Kg.
SBM-114-08/1-M***	1 1/4" BSP	Ø 50	200 ÷ 420 Bar		

Description Subplate for Cetop-08 size distributor equipped with indirect acting, pilot operated, pressure control valve.

Dimensions

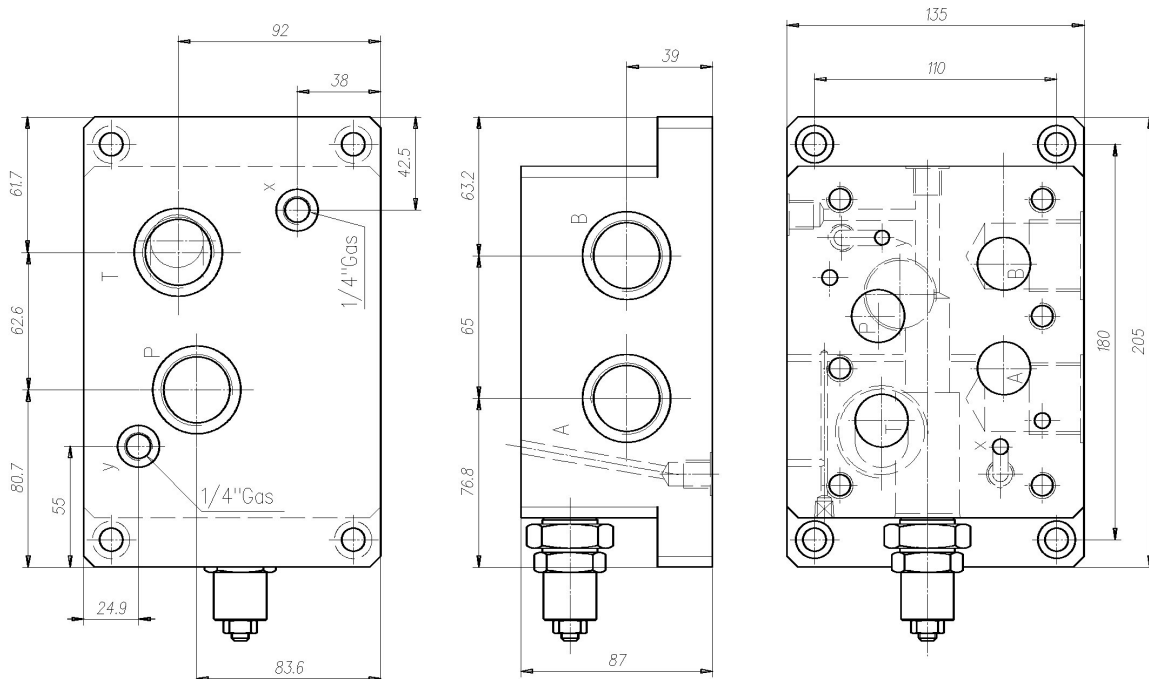

Installation rules

- The subplates type SBM can be mounted in any position
- Fluid to be used: hydraulic oil in compliance with DIN 51524 rules, viscosity between 30 and 100 mm²/s (cSt) at 40°C
- Recommended filtration: 25µ
- Hydraulic fluid temperature: from -20° to +75°C

Ordering code

SBM	-	***	-	08	/	1-M	***
		Setting range : 210=80-210 bar		420=200-420 bar			
		CETOP 08 size					
		100 = 1" BSP		114 = 1 1/4" BSP			
		Subplate					