

HIGH-LOW PRESSURE CONTROL VALVE WITH CETOP-05 SIZE CONNECTION




Characteristics


TYPE	A-B SIDE PORTS	AP REAR PORTS	BP REAR PORTS	T REAR PORTS	MAX FLOW	MAX PRESSURE
VABP-34-05	3/4" BSP	3/8" BSP	3/4" BSP	3/4" BSP	80 Lt./min.	350 Bar

Description High-low pressure control valve with Cetop-05 size connection. The valve can be supplied equipped with vent-hole valve.

Dimensions

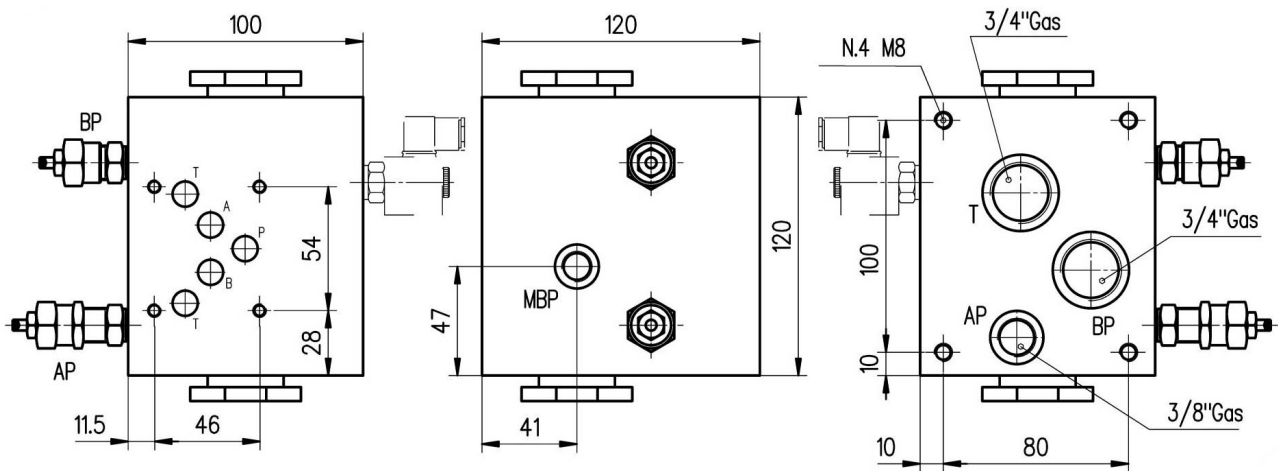

Symbol

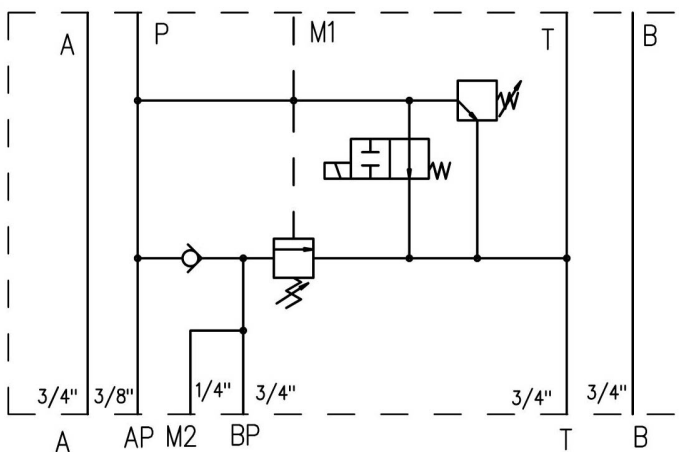

Installation rules

- The valves type VAPB can be mounted in any position
- Fluid to be used: hydraulic oil in compliance with DIN 51524 rules, viscosity between 30 and 100 mm²/s (cSt) at 40°C
- Recommended filtration: 25µ
- Hydraulic fluid temperature: from -20° to +75°C

Ordering code

